




Module Adapter Kit Model MCMA3

Installation and Use Manual

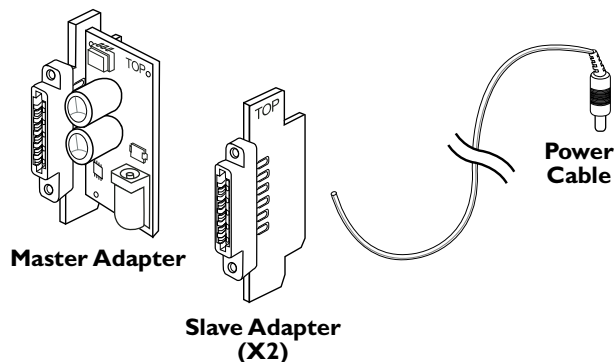

Description

The MCMA3 Module Adapter Kit allows Bogen's latest line of input modules to work with the Multicom MCAPI interface. One MCMA3 kit can adapt from one up to all 3 modules in the MCAPI.

Note: Signal-processing output modules are not compatible with the MCAPI or the MCMA3.

Installation

Master Adapter

A master adapter must always be installed, but the two slave adapters are optional and may be installed on an as needed basis.

1. Connect the power cable to the adapter. Wire tie the power supply cord to the connector if desired.
2. Plug the module into the card edge connector on the adapter and position the power supply cord below the module.
3. Insert the two screws supplied with the module through the module screw holes and install the two washers onto the screw, with the larger washer first and then use the smaller washer to retain the screw and washer in the module hole. Then, insert the module and adapter into the module bay and use the screws to secure the module to the card cage. A gap between the module and the card cage will exist to allow the power supply wire to exit.
4. Turn off the power to the Multicom unit and route the loose end of the power cable to the MC2626 power supply. Connect the cable's single conductor to the -26V terminal on the the MC2626. Power up the Multicom.

Note: Only a single -26V connection is needed to the adapter. The power cable's single conductor connects to the inside terminal of its connector.


Slave Board

Once the master module adapter is installed, the slave adapters can be installed if needed. Slave adapters will not work without a master adapter.

1. Connect the module to the adapter.
2. Insert the module and adapter into the module bay and use the two screws supplied with the module to secure it to the chassis. No washers are used and the module should mount flush against the card cage.

Package Contents

- Master Board
- 2 Slave Boards
- 2 Washers (large)
- Wire Tie
- Power Cable
- 2 Washers (small retaining)

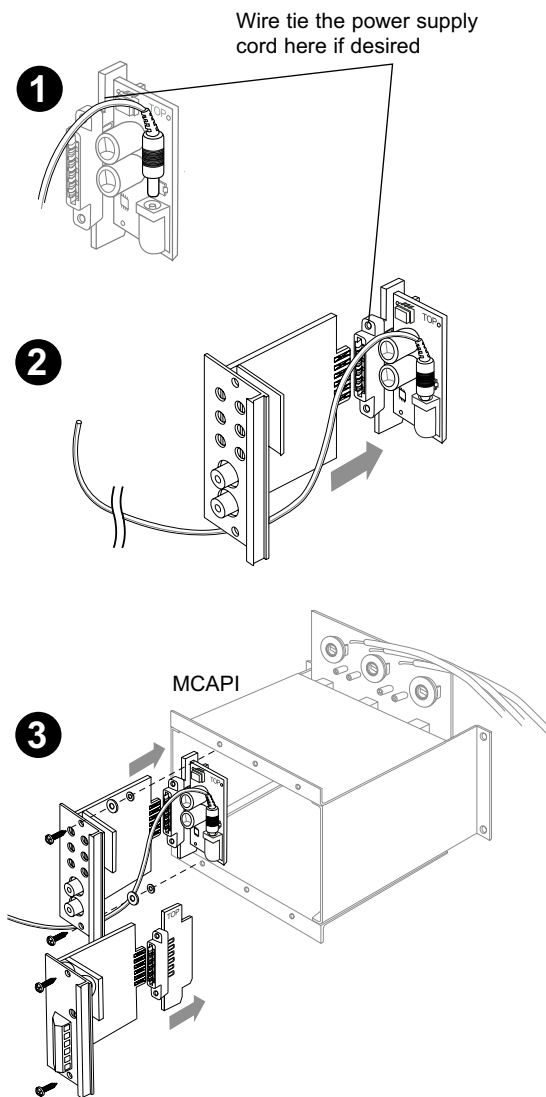

Limited Warranty

The MCMA3 is warranted to be free from defects in material or workmanship for two (2) years from the date of sale to the original purchaser. Any part of the product covered by this warranty that, with normal installation and use, becomes defective will be repaired or replaced by Bogen, at our option, provided the product is shipped insured and prepaid to: Bogen Factory Service Department, 50 Spring Street, Ramsey, NJ 07446, USA. The product will be returned to you freight prepaid. This warranty does not extend to any of our products that have been subjected to abuse, misuse, improper storage, neglect, accident, improper installation or have been modified or repaired or altered in any manner whatsoever, or where the serial number or date code has been removed or defaced.

THE FOREGOING LIMITED WARRANTY IS BOGEN'S SOLE AND EXCLUSIVE WARRANTY AND THE PURCHASER'S SOLE AND EXCLUSIVE REMEDY. BOGEN MAKES NO OTHER WARRANTIES OF ANY KIND, EITHER EXPRESS OR IMPLIED, AND ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE HEREBY DISCLAIMED AND EXCLUDED TO THE MAXIMUM EXTENT ALLOWABLE BY LAW. Bogen's liability arising out of the manufacture, sale or supplying of products or their use or disposition, whether based upon warranty, contract, tort or otherwise, shall be limited to the price of the product. In no event shall Bogen be liable for special, incidental or consequential damages (including, but not limited to, loss of profits, loss of data or loss of use damages) arising out of the manufacture, sale or supplying of products, even if Bogen has been advised of the possibility of such damages or losses. Some States do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from State to State.

Products that are out of warranty will also be repaired by the Bogen Factory Service Department -- same address as above or call 201-934-8500. The parts and labor involved in these repairs are warranted for 90 days when repaired by the Bogen Factory Service Department. All shipping charges in addition to parts and labor charges will be at the owner's expense. All returns require a Return Authorization number.

09/03/2004

BOGEN[®]
COMMUNICATIONS, INC.

50 Spring Street, Ramsey, NJ 07446, U.S.A.

Tel. 201-934-8500, Fax: 201-934-9832, www.bogen.com