


# Multicom 2000®

## Processor Card Model MCPCA2

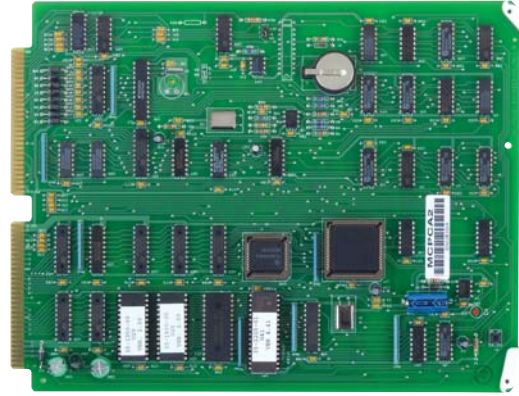

---

### Description

The Multicom 2000® Model MCPCA2 Processor Card is required to operate the system. This card fits in the first slot of the MCRMF or MCMF Card Cage Assembly. The card contains a micro-controller, EPROM storage to hold operating software, EEPROM storage to hold system configuration data, and RAM to hold operating data. The card is responsible for all system control, tone, and display functions. The card also contains the crystal-controlled real-time clock (with battery backup), relay driver circuits, external function inputs, audio tone synthesizer, and voltage supervisor circuit with reset function.

---

### Features

- Contains all system memory
- RAM Operating data
- Crystal-controlled clock with battery backup
- Audio tone synthesizer
- External relay drivers
- Ring/Busy generator
- UART for enhanced administrative phone functions
- Dial Tone generator

---

### Architect and Engineer Specifications

One Model MCPCA2 Processor Card shall be required per system. It shall have an advanced micro-controller, and shall provide EPROM storage to hold operating software, EEPROM storage to hold system configuration data, and RAM storage to hold operating data. The card shall be responsible for all system control, tone, and display functions.

The card shall also contain the crystal-controlled real-time clock (with battery backup), relay input and output driver circuits, external function inputs, audio tone synthesizer, and voltage supervisor circuit with reset function. The card shall be installed in the first slot of the MCRMF or MCMF Card Cage Assembly.

---

### Technical Specifications

**Dimensions:** 10-<sup>9</sup>/<sub>16</sub>" W x 8-<sup>1</sup>/<sub>8</sub>" H x <sup>5</sup>/<sub>8</sub>" D  
**Power:** MC512A Power Supply (sold separately)

**ENGINEERED SYSTEMS**  
**BOGEN®**

50 Spring Street, Ramsey, NJ 07446, U.S.A.  
201-934-8500 FAX: 201-934-9832  
Web Site: [www.bogen.com](http://www.bogen.com)